

(1390 REV. 5-93) US DEPT. OF COMMERCE PATENT &amp; TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER  
108650

**TRANSMITTAL LETTER TO THE  
UNITED STATES  
DESIGNATED/ELECTED OFFICE  
(DO/EO/US) CONCERNING A FILING  
UNDER 35 U.S.C. 371**

U.S. APPLICATION NO.  
(if known, sec 37 C.F.R.1.5)

09/763200

INTERNATIONAL APPLICATION NO.  
PCT/JP00/04898INTERNATIONAL FILING DATE  
July 21, 2000PRIORITY DATE CLAIMED  
July 22, 1999TITLE OF INVENTION  
GLASS PLATE MANUFACTURING METHOD, GLASS PLATE MANUFACTURING APPARATUS, AND LIQUID CRYSTAL DEVICEAPPLICANT FOR DO/EO/US  
Hiroyuki KARIYA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 11. to 16. below concern other document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ Entitlement to small entity status is hereby asserted.
16. ☐ Other items or information:

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) **09/763200**INTERNATIONAL APPLICATION NO.  
PCT/JP00/04898ATTORNEY'S DOCKET NUMBER  
10865017. ☒ The following fees are submitted:**Basic National fee (37 CFR 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO .... \$860.00

International preliminary examination fee paid to USPTO  
(37 CFR 1.482) ..... \$690.00No international preliminary examination fee paid to USPTO  
(37 CFR 1.482) but international search fee paid to USPTO  
(37 CFR 1.445(a)(2)) ..... \$710.00Neither international preliminary examination fee (37 CFR  
1.482) nor international search fee (37 CFR 1.445(a)(2))  
paid to USPTO ..... \$1,000.00International preliminary examination fee paid to USPTO  
(37 CFR 1.482) and all claims satisfied provisions of PCT  
Article 33(2)-(4) ..... \$ 100.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than  
☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR  
1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate		
Total Claims	14 - 20 =		X \$ 18.00	\$	
Independent Claims	3 - 3 =		X \$ 80.00	\$	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	

**TOTAL OF ABOVE CALCULATIONS =**

\$860.00

Reduction by 1/2 for filing by small entity, if applicable.

-

\$

**SUBTOTAL =**

\$860.00

Processing fee of \$130.00 for furnishing the English translation later  
than ☐ 20 ☐ 30 month from the earliest claimed priority date (37 CFR  
1.492(f)).

+

\$

**TOTAL NATIONAL FEE =**

\$860.00

Amount to be  
refunded

\$

Charged

\$

- a. ☒ Check No. 116386 in the amount of \$860.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 15-0461. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320

NAME: James A. Oliff  
REGISTRATION NUMBER: 27,075

NAME: Thomas J. Pardini  
REGISTRATION NUMBER: 30,411

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Hiroyuki KARIYA

Application No.: New US National Stage of PCT/JP00/04898

Filed: February 20, 2001

Docket No.: 108650

For: GLASS PLATE MANUFACTURING METHOD, GLASS PLATE  
MANUFACTURING APPARATUS, AND LIQUID CRYSTAL DEVICE

PRELIMINARY AMENDMENT

Director of the U.S. Patent and Trademark Office  
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please replace claims 3-5, 7-8, 10 and 14 as follows:

3. (Amended) The glass plate manufacturing method according to claim 1,  
wherein the sheet glass subjected to slow cooling exhibits a widthwise temperature  
distribution such that the surface area has a lower temperature than the edge areas.
4. (Amended) The glass plate manufacturing method according to claim 1,  
wherein the strain reduction processing is carried out based on the strain distribution in the  
post-molding glass plate measured in advance using the optical heterodyne method.
5. (Amended) The glass plate manufacturing method according to claim 1,  
wherein the strain reduction process comprises a heat treatment that forms a prescribed  
temperature distribution in the widthwise direction of the sheet glass after the molding is  
reduced when the sheet glass after molding is subjected to slow cooling by means of the heat  
treating unit.
7. (Amended) The sheet glass manufacturing method according to claim 5,  
wherein the heat treatment is a process in which the temperature distribution that is formed,  
in the widthwise direction of the sheet glass, by the heat treating unit for heating the sheet

glass is set such that the temperature difference in the widthwise direction of the sheet glass may be reduced.

8. (Amended) The glass plate manufacturing method according to claim 1, wherein the strain reduction process reduces strain occurring from the surface area to the edge areas by increasing the amount of extension of the surface area in accordance with the heat contraction difference occurring between the edge areas and the surface area in the widthwise direction of the sheet glass.

10. (Amended) The glass plate manufacturing method according to claim 1, wherein the glass plate is a glass substrate used in a display apparatus.

14. (Amended) A liquid crystal device comprising liquid crystal held between a pair of glass plated formed using the glass plate manufacturing method according to claim 1.

REMARKS

Claims 1- 14 are pending. Claims 3-5, 7-8, 10 and 14 are amended to eliminate multiple dependencies. Prompt and favorable consideration on the merits is respectfully requested.

The attached Appendix includes marked-up copies of each rewritten claim (37 C.F.R. 1.121(c)(ii)).

Respectfully submitted,



James A. Oliff  
Registration No. 27,075

Thomas J. Pardini  
Registration No. 30,411

JAO:TJP/zmc  
Date: February 20, 2001

**OLIFF & BERRIDGE, PLC**  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400

DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461
--

## APPENDIX

In the Claims:

The following are marked-up copies of the amended claims:

3. (Amended) The glass plate manufacturing method according to claim 1-~~or~~  
~~claim 2~~, wherein the sheet glass subjected to slow cooling exhibits a widthwise temperature  
distribution such that the surface area has a lower temperature than the edge areas.

4. (Amended) The glass plate manufacturing method according to ~~any of claims~~  
~~1 through 3~~, wherein the strain reduction processing is carried out based on the strain  
distribution in the post-molding glass plate measured in advance using the optical heterodyne  
method.

5. (Amended) The glass plate manufacturing method according to ~~any of claims~~  
~~1 through 4~~, wherein the strain reduction process comprises a heat treatment that forms a  
prescribed temperature distribution in the widthwise direction of the sheet glass after the  
molding is reduced when the sheet glass after molding is subjected to slow cooling by means  
of the heat treating unit.

7. (Amended) The sheet glass manufacturing method according to claim 5-~~or~~  
~~claim 6~~, wherein the heat treatment is a process in which the temperature distribution that is  
formed, in the widthwise direction of the sheet glass, by the heat treating unit for heating the  
sheet glass is set such that the temperature difference in the widthwise direction of the sheet  
glass may be reduced.

8. (Amended) The glass plate manufacturing method according to any of claims 1 through 3, wherein the strain reduction process reduces strain occurring from the surface area to the edge areas by increasing the amount of extension of the surface area in accordance with the heat contraction difference occurring between the edge areas and the surface area in the widthwise direction of the sheet glass.

10. (Amended) The glass plate manufacturing method according to ~~any of~~ claims 1 ~~through 9~~, wherein the glass plate is a glass substrate used in a display apparatus.

14. (Amended) A liquid crystal device comprising liquid crystal held between a pair of glass plates formed using the glass plate manufacturing method according to ~~any of~~ claims 1 ~~through 10~~.

**PATENT APPLICATION**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Hiroyuki KARIYA

Application No.: New US National Stage of PCT/JP00/04898

Filed: March 9, 2001

Docket No.: 108650

For: GLASS PLATE MANUFACTURING METHOD, GLASS PLATE  
MANUFACTURING APPARATUS, AND LIQUID CRYSTAL DEVICE


**LETTER TO THE OFFICIAL DRAFTSPERSON**

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

Sir:

Please substitute the attached 7 sheets of formal drawings depicting Figures 1-8 for  
the corresponding drawings filed with the application.

Respectfully submitted,

  
James A. Oliff  
Registration No. 27,075

Joel S. Armstrong  
Registration No. 36,430

JAO:JSA/zmc

Date: March 9, 2001

**OLIFF & BERRIDGE, PLC**  
**P.O. Box 19928**  
**Alexandria, Virginia 22320**  
**Telephone: (703) 836-6400**

DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461
--

FIG.1

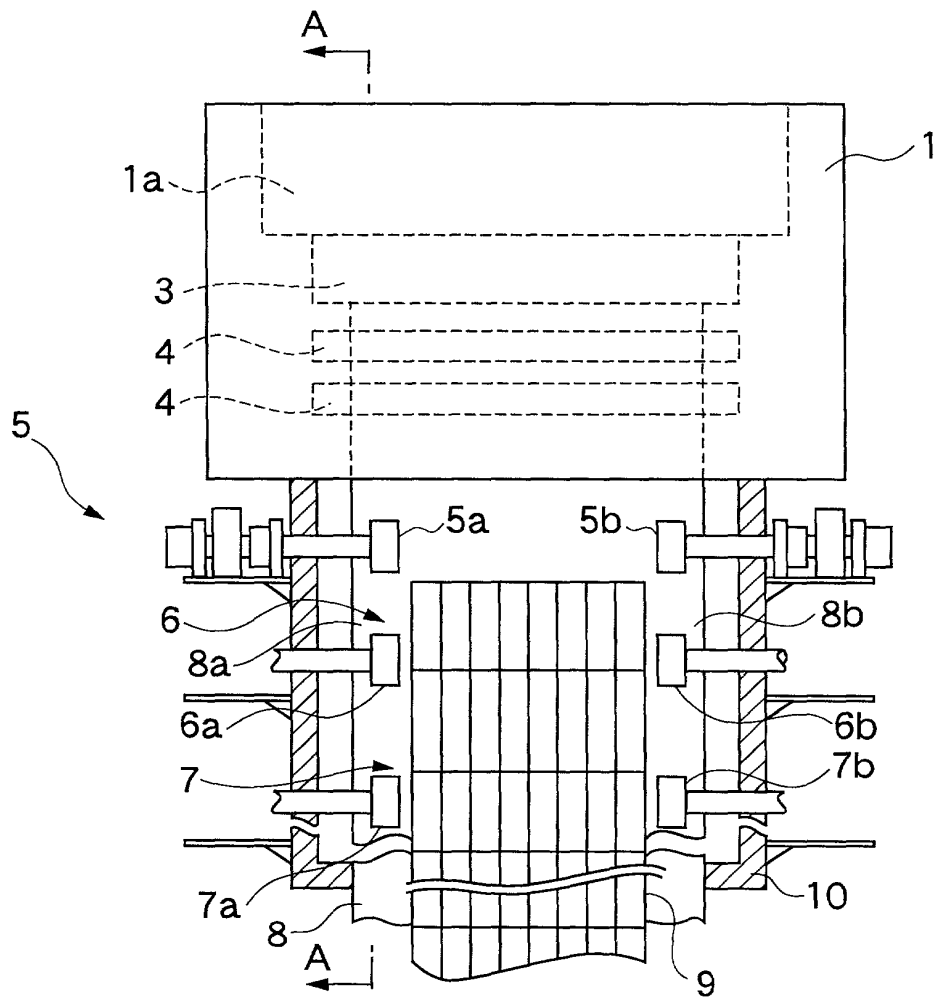




FIG.2

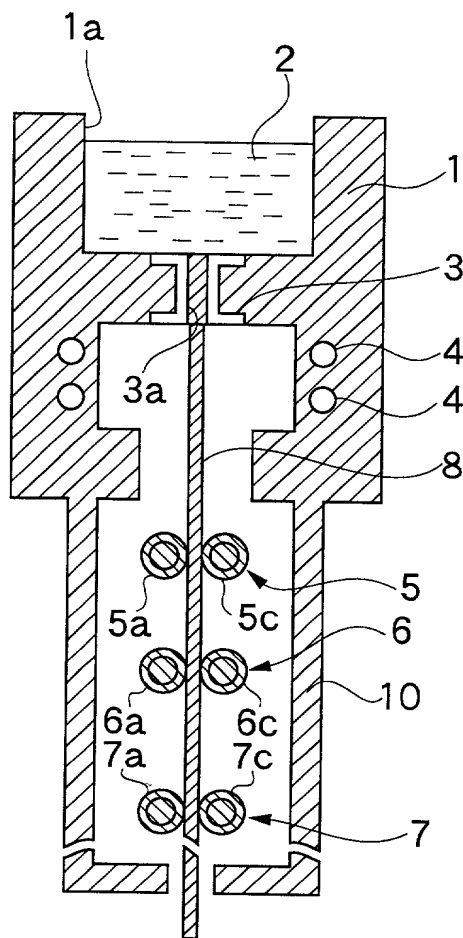


FIG.3

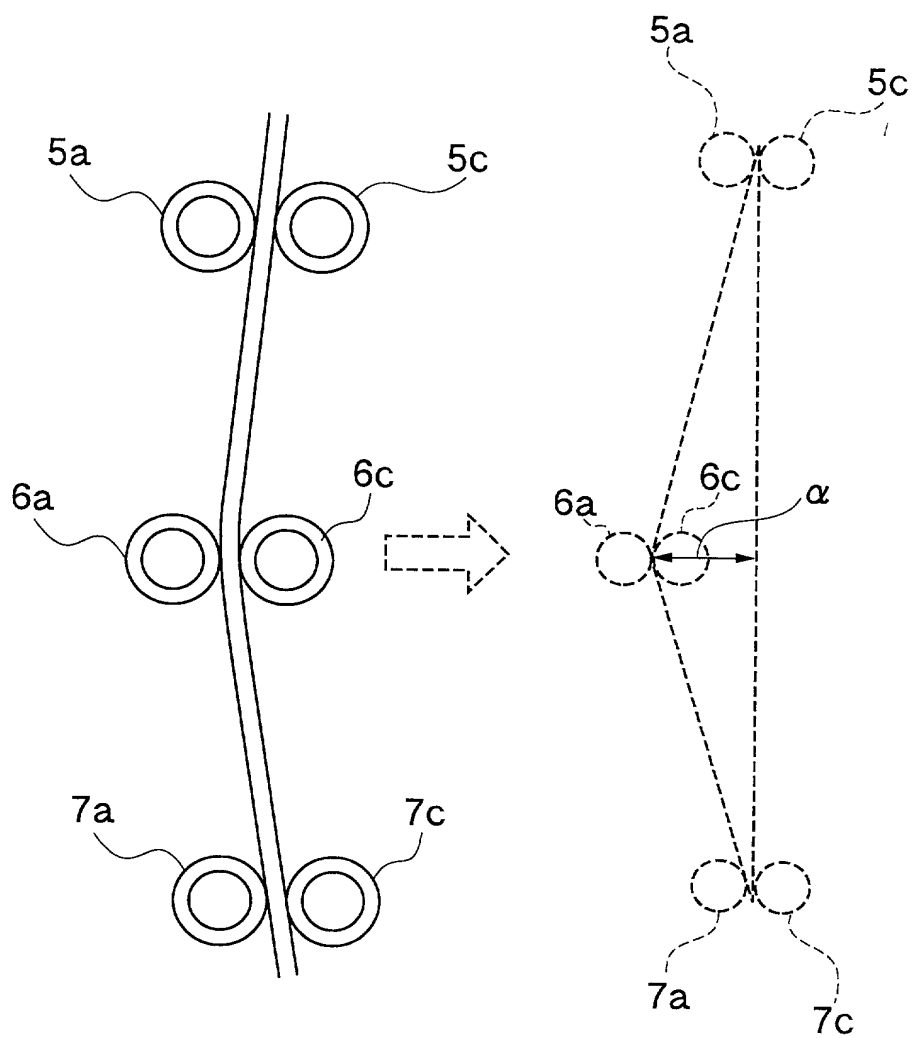


FIG.4

	Re (nm)
$\bar{\lambda}$	1.81
30	2.75
Max.	4.10
Min.	0.03
$n \leq 200$	

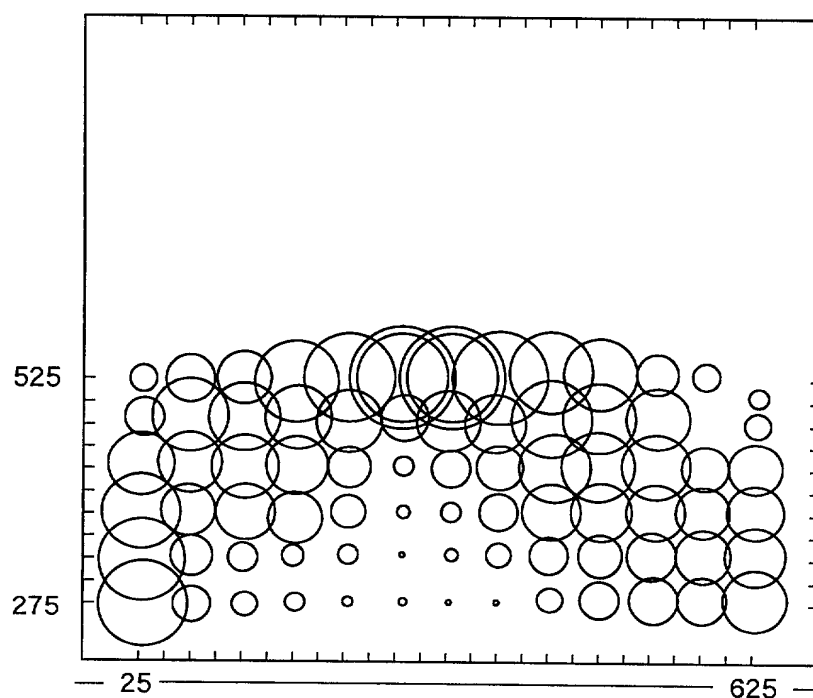


FIG.5

	L	C	R
1 ATMOSPHERE	797	808	795
1 GLASS	711	730	702
2 ATMOSPHERE	748	761	743
2 GLASS	690	695	683
3 ATMOSPHERE	736	766	731
3 GLASS	657	660	654
4 ATMOSPHERE	734	764	719
4 GLASS	631	630	622

FIG.6


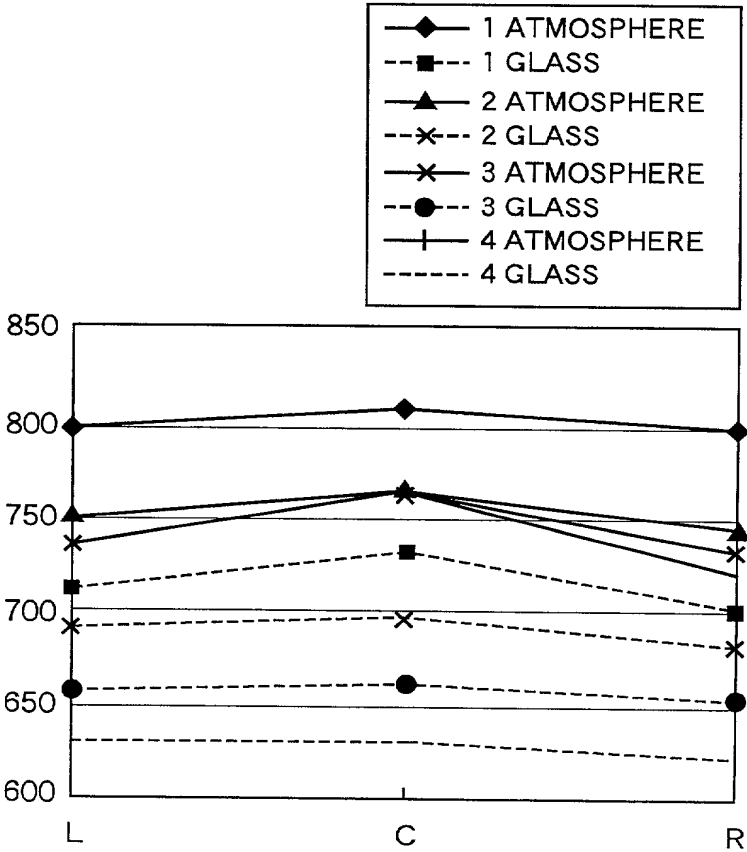


FIG.7


	Re (nm)
$\bar{x}$	0.29
30	0.46
Max.	0.77
Min.	0.03
$n \leq 200$	

0 1 2 3  $\times 1.5\text{nm}$   
(Ratio)

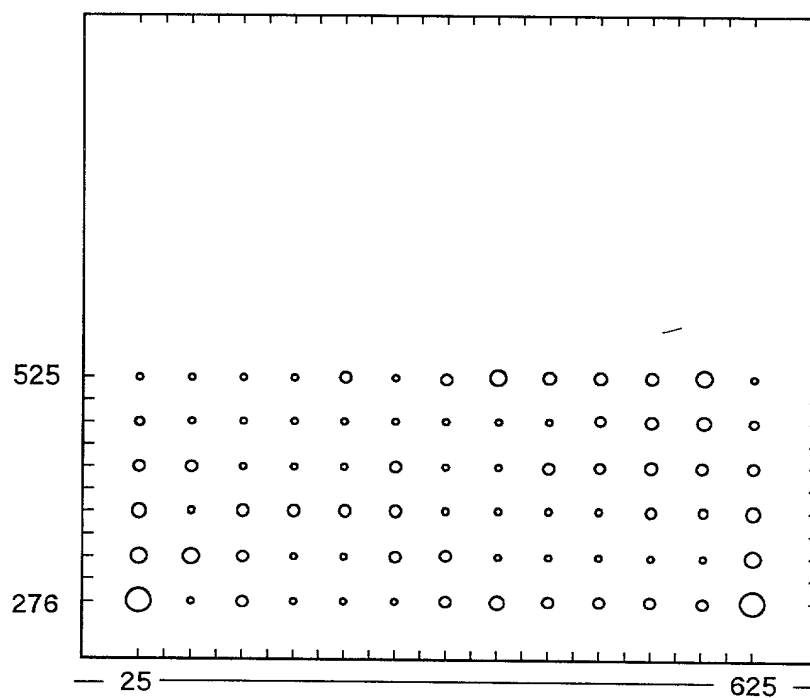


# FIG.8

CORRELATION BETWEEN STRAIN AND T.P. SHIFT  
AMOUNT WHEN SHEET GLASS IS SEGMENTED

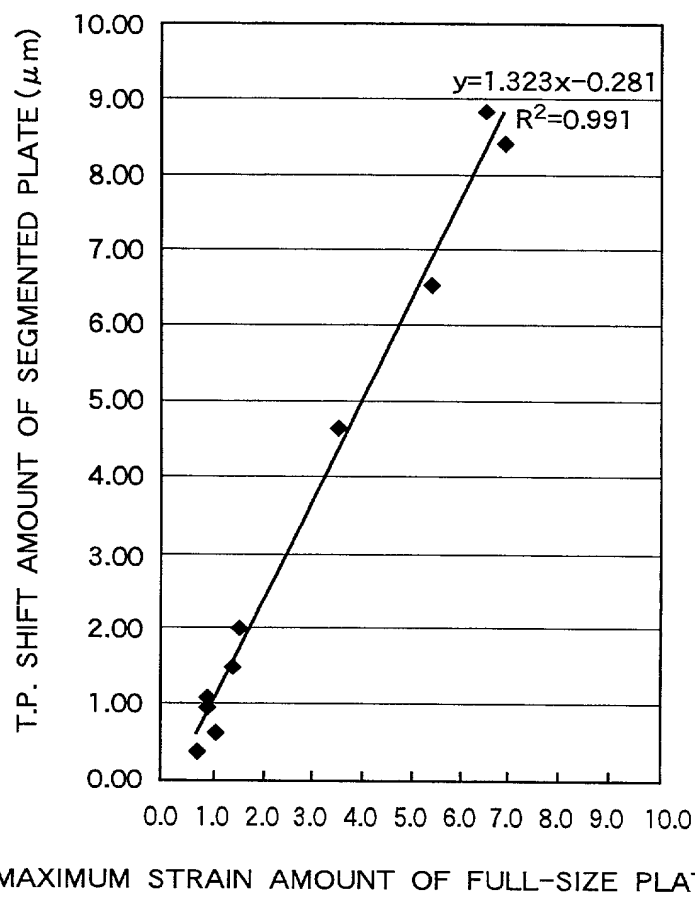

09/763200

JC02 Rec'd PCT/PTO 20 FEB 2001

**Inventor Information**

Inventor One Given Name:: Hiroyuki  
Family Name:: KARIYA  
Country of Residence:: JAPAN

**Correspondence Information**

Correspondence Customer Number:: 25944  
Name Line One:: Oliff & Berridge PLC  
Address Line One:: P.O. Box 19928  
City:: Alexandria  
State or Province:: VA  
Postal or Zip Code:: 22320  
Telephone:: (703) 836-6400  
Fax:: (703) 836-2787  
Electronic Mail:: commcenter@oliff.com

**Application Information**

Title Line One:: GLASS PLATE MANUFACTURING METHOD,  
Title Line Two:: GLASS PLATE MANUFACTURING APPARATUS,  
Title Line Three:: AND LIQUID CRYSTAL DEVICE  
Total Drawing Sheets:: 7  
Docket Number:: 108650

**Continuity Information**

>This application is a:: 371 of  
Application One:: PCT/JP00/04898  
Filing Date:: July 21, 2000

**Prior Foreign Applications**

Foreign Application One:: 11-208171  
Filing Date:: July 22, 1999  
Country:: JAPAN  
Priority Claimed:: YES

7/PRTS

09/763200  
JC02 Rec'd PCT/PTO 20 FEB 2001

DESCRIPTION

GLASS PLATE MANUFACTURING METHOD, GLASS PLATE MANUFACTURING  
APPARATUS, AND LIQUID CRYSTAL DEVICE

5

TECHNICAL FIELD

The present invention relates to a manufacturing method  
by which to manufacture a thin glass plate (sheet glass) such  
10 as a glass substrate for use with liquid crystal, as well as a  
glass plate manufacturing apparatus and a liquid crystal  
device.

BACKGROUND ART

15

As manufacturing methods for this type of sheet glass,  
the float method and the downdraw method are known, but when  
it is desired to manufacture a glass substrate for a liquid  
crystal display, the downdraw method is more widely used for  
20 cost reasons, as it entails little or no polishing after  
molding.

An example of the downdraw method is described in  
connection with the method disclosed in Japanese Patent  
25 Application Laid-Open No. 10-291826. The method disclosed  
therein involves the manufacturing a glass substrate by  
continuously providing molten glass from a melting tank along  
molding surfaces, fusing the glass on both sides below the  
molds, and drawing the glass downward using rollers at the  
30 edge areas of the glass.



Because the glass substrate obtained through this type of manufacturing method is formed such that both surfaces at the time of molding are free surfaces, and such that the glass surfaces that were in contact with the mold are fused together, it offers superior smoothness and flatness.

Generally, the glass plate that is obtained through this manufacturing method and has outer dimensions of 1m x 1m and a thickness of 0.7mm is cut to a size of 550 x 650mm or 600 x 720mm, and is used as a glass substrate for a liquid crystal display. Examples of such a liquid crystal device glass substrate include a TFT glass substrate or a color filter glass substrate.

For a TFT glass substrate, a thin film transistor (TFT) is formed on the surface of the glass substrate, while for a color filter glass substrate, a color filter is formed on the surface of the glass substrate. A liquid crystal device is formed by encasing liquid crystal between two glass substrates on which these thin films are formed.

However, glass plates manufactured using the conventional downdraw method have the problem that a substantial amount of strain occurs in the widthwise direction (the direction perpendicular to the direction in which the glass is drawn). This strain is caused by a plate thickness distribution peculiar to the downdraw method. The plate thickness of sheet glass manufactured using the downdraw method is larger at the

edge areas in the widthwise direction than at the center area (called the 'surface area' below). Consequently, when the sheet glass is slowly cooled from a high temperature after molding, because the cooling speed of the surface area is  
5 faster than the cooling speed at the edge areas, compressive stress occurs at the edge areas, while tensile stress occurs at the surface area, and as a result, minute strain occurs in the widthwise direction. In addition, this strain tends to be relatively larger at the edge areas than at the surface area.

10

When a piece of this sheet glass having this type of strain distribution is cut out in the size appropriate for a display apparatus glass substrate, the strain distribution continues to exist in a reconstructed state, which causes  
15 minute deformation of the glass substrate.

When a thin film transistor (TFT) or a thin film pattern for a color filter is formed via photolithography on the surface of the glass substrate having this type of minute  
20 deformation, exposure is not performed accurately during the photolithography process, and as a result, the problem occurs that the precision of the thin film pattern is reduced.

Furthermore, when a TFT glass substrate is combined with  
25 a color filter glass substrate, the alignment marks become offset due to the minute deformation in the glass plates, and as a result, the problem occurs that the yield of the liquid crystal devices declines.

In particular, when the glass substrate is large in size, the problem occurs that the amount of deformation of the glass substrate is accordingly large and the amount of offset of the pattern positioning is large as well.

5

The present invention was created in view of the above problems, and has the objects described below.

One object of the present invention is to inhibit the  
10 occurrence of minute strain or minute deformation in the  
downdraw method.

Another object of the present invention is to prevent the  
occurrence of positioning offset of the pattern formed through  
15 photolithography on the surface of a glass substrate used in a  
display apparatus.

Yet another object of the present invention is to prevent  
the occurrence of strain when a piece of sheet glass that is  
20 formed through the downdraw method is cut into a prescribed  
size.

Still another object of the present invention is to  
improve the yield obtained during manufacture of liquid  
25 crystal devices.

#### DISCLOSURE OF THE INVENTION

Accordingly, the present invention proposes a manufacturing method wherein, in order to eliminate strain caused by temperature variations in the widthwise direction of the sheet glass when the downdraw method is used, carries out strain reduction processes during the slow cooling of the sheet glass.

Construction 1: A glass plate manufacturing method for manufacturing a glass plate by forming molten glass into a sheet using the downdraw method and subjecting the obtained sheet glass to slow cooling using a heat treating unit, wherein a strain reduction process to reduce strain occurring in the sheet glass due to the temperature difference between the edge areas and the surface area in the widthwise direction of the sheet glass is performed during the slow cooling.

For a glass material suitable for the downdraw method, it is preferred from the standpoint of maintaining transparency that the material have a liquid phase temperature of 1200°C or lower, and ideally a liquid phase temperature of 1100°C or lower. It is further preferred that the thickness of the sheet glass be between 0.5 and 1.0mm.

It is also preferred that the strain reduction processes be carried out immediately after molding.

Construction 2: The glass plate manufacturing method according to the Construction 1, wherein the temperature

difference occurs between the center region of the surface area and the edge areas.

Construction 3: The glass plate manufacturing method  
5 according to the Construction 1 or the Construction 2, wherein the sheet glass subjected to slow cooling exhibits a widthwise temperature distribution such that the surface area has a lower temperature than the edge areas.

10 Construction 4: The glass plate manufacturing method according to any of Constructions 1 through 3, wherein the strain reduction processes are carried out based on the strain distribution in the post-molding glass plate measured in advance using the optical heterodyne method.

15 Because the strain addressed by the present invention comprises minute strain (deformation), it is preferred that the birefringence amount be measured through optical heterodyne measurement, which can measure minute strain  
20 (minute deformation) with high precision, and that the strain reduction processes be carried out based on the results of this measurement. Measurement of the strain using the optical heterodyne method allows the widthwise temperature distribution in the sheet glass after molding to be easily  
25 understood.

Construction 5: The glass plate manufacturing method according to any of Constructions 1 through 4, wherein the strain reduction process comprises a heat treatment that forms

a prescribed temperature distribution in the widthwise direction of the sheet glass so that the temperature difference in the widthwise direction of the sheet glass after molding is reduced when the sheet glass is subjected to slow  
5 cooling by means of the heat treating unit after molding.

It is preferred that the temperature range used for slow cooling of the sheet glass be 600 to 850°C. It is further preferred that the method for reducing the temperature  
10 difference in the widthwise direction of the sheet glass comprise heat treatment by a heat treating unit having a temperature distribution whereby the widthwise temperature distribution of the sheet glass is offset.

15 Because this heat treatment is carried out during the slow cooling process, the widthwise temperature distribution of the sheet glass changes with the cooling time. Therefore, it is preferred that the temperature distribution of the heat treating unit change continuously or in steps along the  
20 direction of drawing in accordance with the temperature distribution of the sheet glass.

Construction 6: The glass plate manufacturing method according to Construction 5, wherein the thermal process is  
25 carried out at least through a process in which the sheet glass is slowly cooled from the molding temperature to a temperature near the strain point.

It is preferred that the heat treatment be carried out within a temperature range from the molding temperature of the sheet glass to an extraction temperature equal to or lower than the strain point, but it is effective if the heat treatment is carried out through the slow cooling process in which the sheet glass is slowly cooled from the molding temperature to a temperature near the strain point. It is preferred that the thermal process be carried out through a process in which the sheet glass is slowly cooled from a temperature that is 400 to 500°C lower than the molding temperature to a temperature near the strain point. In addition, it is preferred that where the widthwise temperature of the sheet glass is made essentially uniform at a temperature near the strain point, and slow cooling at or below the strain point is thereafter carried out, that the uniform temperature state of the sheet glass be maintained and that slow cooling be further carried out.

Furthermore, the preferred range for the temperature near the strain point is 50°C above and below the strain point.

Construction 7: The sheet glass manufacturing method according to Construction 5 or Construction 6, wherein the heat treatment is a process in which the temperature distribution that is formed, in the widthwise direction of the sheet glass, by the heat treating unit for heating the sheet glass is set such that the temperature difference in the the widthwise direction of the sheet glass may be reduced.

Where the temperature distribution is formed via the heat treating unit, it is preferred that, rather than forming such temperature distribution suddenly near the strain point, the temperature distribution near the strain point be used as a reference, and that a temperature distribution obtained by flattening this temperature distribution near the strain point be formed in steps or continuously in the slow cooling process from the strain point and the molding temperature.

10

Construction 8: The glass plate manufacturing method according to any of Constructions 1 through 3, wherein the strain reduction process reduces strain occurring from the surface area to the edge areas by increasing the amount of extension of the edge areas relative to the amount of extension of the surface area in accordance with the heat contraction difference occurring between the edge areas and the surface area in the widthwise direction of the sheet glass.

20 It is preferred that the strain reduction processes be carried out through slow cooling within a temperature range of 600 to 850°C.

Construction 9: A glass plate manufacturing method wherein the maximum strain of the manufactured sheet glass is 0.07 kg/mm<sup>2</sup> or less.

It is further preferred that the maximum strain be 0.04 kg/mm<sup>2</sup> or less.



Construction 10: The glass plate manufacturing method according to any of Constructions 1 through 9, wherein the glass plate is a glass substrate used in a display apparatus.

5

It is preferred that the display apparatus comprise a liquid crystal device, and that the glass substrate for the liquid crystal device have an expansion coefficient of  $32-38 \times 10^{-7}/^{\circ}\text{C}$ , and that the strain point be at least  $650^{\circ}\text{C}$ .

10

It is preferred that the glass have a composition comprising 60-70%  $\text{SiO}_2$ , 7-12%  $\text{B}_2\text{O}_3$ , 9-13%  $\text{Al}_2\text{O}_3$ , 1-8%  $\text{MgO}$ , 2-8%  $\text{CaO}$ , 0.5-5%  $\text{SrO}$ , and 0.5-5%  $\text{BaO}$ , where the percentages are expressed in terms of molar percentages.

15

It is also preferred that the glass have a composition comprising 65-75%  $\text{SiO}_2$ , 6-11%  $\text{B}_2\text{O}_3$ , 8-15%  $\text{Al}_2\text{O}_3$ , 3-15%  $\text{MgO}$ , 0-8%  $\text{CaO}$ , 0-1%  $\text{SrO}$ , and 0-1%  $\text{BaO}$ .

20

Construction 11: A glass plate manufacturing apparatus that includes a molding unit that molds molten glass provided continuously from a molten glass storage tank into a sheet;

a drawing unit that draws down the sheet glass molded by the molding unit and existing in a softened state; and

25

a strain reduction unit that reduces the strain caused by the temperature difference occurring from the edge areas to the surface area in the widthwise direction of the sheet glass.

Construction 12: The glass plate manufacturing apparatus according to Construction 11, wherein the strain reduction unit is a heat treating unit that slowly cools the sheet glass after molding, and sets in the widthwise direction of the sheet glass a temperature distribution that reduces the temperature difference in the widthwise direction of the post-molding sheet glass.

It is preferred that the heat treating unit be located on one side or both sides of the sheet glass. It is also preferred that the heat treating unit be located near the surface or surfaces of the sheet glass.

Construction 13: The glass plate manufacturing apparatus according to Construction 11, wherein the strain reduction unit has a heat treating unit that slowly cools the sheet glass after molding and a unit that performs control to ensure that the amount of extension of the edge areas is larger than the amount of extension of the surface area in accordance with the temperature difference from the surface area to the edge areas of the sheet glass that is being slowly cooled by the heat treating unit.

Construction 14: A liquid crystal device comprising liquid crystal held between a pair of glass plates formed through the glass plate manufacturing method according to any of Constructions 1 through 10.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram showing an embodiment of the glass plate manufacturing apparatus of the present invention that manufactures sheet glass from molten glass;

Fig. 2 is a cross-section of the apparatus shown in Fig. 1 cut along the A-A line;

Fig. 3 is a side view of the drawing rollers shown in Fig. 1;

Fig. 4 is a drawing showing a strain distribution in a glass plate that has not undergone strain reduction processing;

Fig. 5 is a table showing the temperatures of the heaters and the glass during the strain reduction processing;

Fig. 6 is a graph of the data shown in Fig. 5;

Fig. 7 is a drawing showing the strain distribution in a glass plate after it has undergone strain reduction processing; and

Fig. 8 is a drawing showing the relationship between the total pitch shift amount of a glass plate after it was cut out and the strain amount of the sheet glass before it was cut into pieces.

## BEST MODE FOR CARRYING OUT THE INVENTION

Embodiments of the present invention will be explained  
5 below with reference to the drawings.

Fig. 1 is a schematic diagram showing an embodiment of  
the glass plate manufacturing apparatus of the present  
invention that manufactures sheet glass from molten glass, Fig.  
10 2 is a cross-section of the apparatus shown in Fig. 1 cut  
along the A-A line, Fig. 3 is a side view of the drawing  
rollers shown in Fig. 1, Fig. 4 is a drawing showing a strain  
distribution in a glass plate that has not undergone strain  
reduction processing, Fig. 5 is a table showing the  
15 temperatures of the heaters (heat treating unit) and the glass  
during the strain reduction processing, Fig. 6 is a graph of  
the data shown in Fig. 5, Fig. 7 is a drawing showing the  
strain distribution in a glass plate after it has undergone  
strain reduction processing, and Fig. 8 is a drawing showing  
20 the relationship between the total pitch shift amount of a  
glass plate after it was cut out and the strain amount of the  
sheet glass before it was cut into pieces.

(Glass plate manufacturing apparatus)

25

First, a manufacturing apparatus that implements a glass  
plate manufacturing method and comprises one embodiment of the  
present invention will be described below with reference to  
Figs. 1 through 3.

The glass plate manufacturing apparatus comprising one embodiment of the present invention comprises basically a molten glass storage tank 1 and a cooling oven 10, as shown in  
5 Fig. 1.

The molten glass storage tank 1 has a storage unit 1a having an opening, and the molten glass 2 obtained through melting of the glass raw material at a prescribed temperature  
10 is stored in the storage unit 1a. A molding unit 3 is formed at the bottom edge of the storage unit 1a. A slit-shaped opening 3a that extends in the widthwise direction of the sheet glass 8 is formed in the molding unit 3. The molding unit 3 comprises heat-resistant bricks coated with white gold.

15

The molten glass may be molded into sheet-shaped glass 8 by drawing the molten glass 2 through the opening 3a. The sheet glass 8 passing through the molding unit 3 is slowly cooled by heaters 4 in order to inhibit the contraction of the  
20 edge areas toward the center area that would result from rapid cooling.

The slow cooling oven 10 slowly cools the glass 8 molded into a sheet shape and is hollow inside, such that as the edge  
25 areas of the sheet glass 8 are drawn downward by the drawing rollers 5 through 7, slowly cooling is carried out while rapid cooling of the sheet glass 8 is prevented by the heat treating unit 9.

The drawing rollers 5 through 7 are aligned in the direction of drawing of the sheet glass 8, and are located at prescribed distances from each other. The heat treating unit 9 is located at a prescribed distance from and near the main surface of the sheet glass 8.

The drawing rollers 5 through 7 grasp the edge areas 8a and 8b of the sheet glass 8 and draw the sheet glass 8 downward. The drawing rollers 5a, 6a and 7a draw the sheet glass 8 downward in concert with the drawing rollers 5c, 6c and 7c located at the back side of the sheet glass 8, as shown in Fig. 2. The drawing rollers 5b, 6b and 7b shown in Fig. 1 also have drawing rollers not shown in the drawing that draw down the sheet glass in cooperation with the drawing rollers 5b, 6b and 7b and are located at the reverse side of the sheet glass 8.

The drawing rollers 5 through 7 that are aligned in the direction of drawing of the sheet glass 8 are positioned such that adjacent rollers are displaced relative to each other by a prescribed amount in the direction of thickness of the sheet glass 8. In this way, the edge areas of the sheet glass travel a longer distance than the surface area. For example, with regard to the roller pairs 5a/5c, 6a/6c and 7a/7c located at the left side of Fig. 1, the rollers 6a/6c are displaced by a distance  $\alpha$  relative to the rollers 5a/5c and 7a/7c. The rollers 5b, 6b and 7b shown in Fig. 1 are also positioned in a similar fashion, though this is not apparent in the drawing.

The heat treating unit 9 used for slow cooling may form a prescribed temperature distribution in both the widthwise direction and the drawing direction of the sheet glass 8 in order to prevent the occurrence of strain. Consequently, the

5 heat treating unit 9 has a plurality of heaters aligned in the widthwise direction (the horizontal direction) and the drawing direction (the vertical direction) of the sheet glass 8. In the drawing, a representative situation in which eight heaters are arrayed along the widthwise direction of the sheet glass 8

10 is shown. In addition, ten heaters, for example, are arrayed along the direction of drawing of the sheet glass 8, though these heaters are not shown in the drawing. The temperature of each heater may be individually controlled. The use of plural heaters arrayed along the widthwise direction of the sheet

15 glass 8 is intended to form identical prescribed temperature distributions in the same direction in order to reduce the occurrence of strain in the same direction. Furthermore, the use of multiple heaters along the direction of drawing of the sheet glass 8 is intended to form prescribed temperature

20 distributions that will prevent rapid cooling and permit slow cooling in the same direction. Rapid cooling is prevented in order to prevent damage to the sheet glass 8 during the drawing process. In particular, when rapid temperature changes occur to the sheet glass 8 within the range of 600-700°C,

25 damage can easily occur to the sheet glass 8 due to buckling deformation.

(Glass plate manufacturing method)

A method by which to manufacture a glass plate using the above apparatus will be explained below using the example of manufacture of a glass substrate for a liquid crystal display.

5        At the outset, preparations for the strain reduction processing are carried out. First, the amount of strain in the sheet glass 8 that has not undergone strain reduction processing is measured using the optical heterodyne method. The measurement sample is a glass plate cut out from the sheet  
10    glass 8 and having a width of 650mm and a length of 550 mm. The results of the measurement are shown in Fig. 4. As seen from the table, the amount of strain of the sheet glass 8 has a distribution wherein it increases gradually from the center region of the display area to the edge areas, and the maximum  
15    strain is the strain at which the birefringence  $R_e$  is 4.1nm (strain: 0.12 kg/mm<sup>2</sup>).

The scale used in the drawing indicates the length in millimeters. The centers of the individual circles on the  
20    glass plate represent measurement points, and the size of each circle indicates the amount of strain. While not shown in the drawing, the fast axis that indicates the direction of strain runs toward the center bottom edge of the glass plate.

25        Next, data indicating the correlation between the measured strain distribution and the amounts of positional adjustment of the drawing rollers 5 through 7, as well as data indicating the correlation between the strain distribution and



the widthwise temperature distribution of the heat treating unit 9 are obtained.

Based on this data, the amount of displacement regarding the drawing rollers 5 through 7 needed to reduce the occurrence of strain and the widthwise temperature distribution of the sheet glass 8 set by the heat treating unit 9 are determined.

10       Based on these preparations, the sheet glass 8 is manufactured from molten glass.

First, the aluminosilicate raw material is melted at a melting temperature of 1550-1650°C in a melting tank not shown in the drawings, and after refining and homogenization are carried out, molten glass is obtained. The molten glass is then moved from the melting tank to the storage unit 1a.

Incidentally, the aluminosilicate glass raw material used was mixed so that the following composition would be obtained: 65% SiO<sub>2</sub>, 11% B<sub>2</sub>O<sub>3</sub>, 12% Al<sub>2</sub>O<sub>3</sub>, 12% MgO, 5% CaO, 2.4% SrO, and 1.65% BaO.

The characteristics of this glass are as follows: Strain point = 650°C, photoelastic constant = 33nm/cm/kgf/cm<sup>2</sup>.

Next, the molten glass 2 stored in the storage unit 1a is formed into sheet glass 8 via the opening 3a in the molding

unit 3. The molding temperature for this process is set to be 1150-1250°C.

The sheet glass 8 molded in this way is then slowly  
5 cooled by the strain reduction unit as the occurrence of strain is inhibited.

These strain reduction processes are explained below.

10 The strain reduction method combines two types of strain reduction methods: a method in which the amount of stretch of the sheet glass 8 due to heat contraction difference is controlled (method 1) and a method in which heat treatment is then carried out by forming a temperature distribution through  
15 a slow cooling process (method 2).

(Method 1: Method in which drawing rollers 5 through 7 are displaced)

20 When the sheet glass 8 is drawn downward by the drawing rollers 5 through 7, because one of the adjacent roller pairs (rollers 6) is offset by an amount  $\alpha$ , the edge areas of the sheet glass 8 are drawn to a greater degree than the surface area. As a result, some of the strain attributable to a  
25 difference in the thickness of the edge areas and the surface area may be eliminated. This is based on the following effect.

In the prescribed distance in the direction in which the sheet glass 8 is conveyed, the amount of heat contraction of

the surface area is larger than the amount of heat contraction of the edge areas. Therefore, if the surface area and the edge areas are drawn down in a uniform fashion, strain occurs. Accordingly, if the drawing distance for the edge areas having  
5 a relatively smaller contraction amount is longer than the drawing distance for the surface area, appropriate drawing distances for the surface area and the edge areas may be maintained in accordance with the difference in their heat contraction amounts, and consequently, the occurrence of  
10 strain may be inhibited.

(Method 2: Method in which heat treatment is performed through forming of temperature distribution during slow cooling process)

15

The heat treating unit 9 of this embodiment has multiple heaters arrayed in the widthwise direction and the drawing direction of the sheet glass 8, as described above. The table shown in Fig. 5 indicates the temperatures ( $^{\circ}\text{C}$ ) of each heater  
20 arrayed in the widthwise direction and the drawing direction of the sheet glass 8, as well as the temperature ( $^{\circ}\text{C}$ ) of the sheet glass 8 at the areas corresponding to each heater.

The vertical columns in the table indicate the  
25 temperatures of the multiple heaters sequentially arrayed in the drawing direction of the sheet glass 8 and the temperatures at the areas of the sheet glass 8 corresponding to each heater. Here, 'Atmosphere' indicates the temperature

of each heater, while 'Glass' indicates the temperature of the sheet glass 8.

5 The temperature of each heater is measured through, for example, measurement of the temperature of the air at a position located 20mm away from the surface of the sheet glass 8 using a thermocouple. The temperature of the sheet glass 8 is measured through measurement of the temperature of the sheet glass 8 using a radiation thermometer.

10

The table shows the temperatures of four groups of heaters located at progressively farther distances from the molding unit 3, as well as the temperatures of the sheet glass 8 at areas corresponding to each heater. These four heater  
15 groups are referred to as first, second, third and fourth heater groups in the order of their proximity to the molding unit 3.

In the table, '1 Atmosphere' through '4 Atmosphere'  
20 indicate the temperatures of the first through fourth heater groups, respectively. Similarly, '1 Glass' through '4 Glass' indicate the temperatures of the sheet glass at the areas corresponding to the heaters of the first through fourth heater groups, respectively.

25

The 'L' in the first row indicates the heater located at the left edge of the sheet glass 8 in the widthwise direction, the 'C' indicates the heater located at the center of the

sheet glass 8, and the 'R' indicates the heater located at the right edge of the sheet glass 8.

Fig. 6 is a graphical representation of the data shown in the table in Fig. 5.

As can be determined from Figs. 5 and 6, the temperatures of the multiple heater groups arrayed in the widthwise direction of the sheet glass 8 are set so that the temperatures of the heaters located at the center of the sheet glass 8 are higher than the temperatures of the heaters located at the edges thereof. Specifically, the temperatures of the center heaters ( $^{\circ}\text{C}$ ) are set to be 13-45 $^{\circ}\text{C}$  higher than the temperatures of the edge heaters (R and L). Furthermore, the differences in their temperatures are set to decline gradually from the first heater to the fourth heater.

At the same time, the temperature of the sheet glass 8 is set so that the temperature of the center of the surface area of the sheet glass 8 at the area corresponding to the first heater is 28 $^{\circ}\text{C}$  higher than the temperature of the edge areas. By contrast, the difference in temperature between the center area and the edge areas at the area corresponding to the third heater is set to be 3 $^{\circ}\text{C}$ . In this way, the temperature of the sheet glass 8 in the widthwise direction is made uniform at this area. In addition, the temperature of the sheet glass 8 in the areas corresponding to the third heater group is controlled to equal the strain point temperature of 650 $^{\circ}\text{C}$ . In

other words, it can be seen that the temperature of the sheet glass 8 is made uniform in the widthwise direction at a temperature near the strain point of the sheet glass 8.

5       The heater group that fulfills an important role in this embodiment is the third heater group, which carry out heat treatment at a temperature near the strain point. The first and second heater groups are located so as to prevent rapid temperature change due to the cooling of the sheet glass 8  
10 from the molding temperature (1200°C) to the strain point. The fourth heater group is located so as to carry out slow cooling of the sheet glass 8 to an even lower temperature while a uniform temperature distribution achieved by the third heater group is maintained. The fifth through tenth heater groups  
15 (not shown in the drawings) following the fourth heater group are located so as to gradually carry out slow cooling to the extraction temperature of the sheet glass 8 (150-180°C), like the fourth heater group. In other words, these heater groups carry out incremental heat treatment of the sheet glass 8 so  
20 that slow cooling occurs while rapid cooling is prevented.

The sheet glass 8 conveyed to the extraction position is cut at prescribed intervals in the drawing direction and carried out from the apparatus.

25

The thickness of the sheet glass 8 when molding was completed was 4-6mm at the edge area (the area extending 120-130mm from the edge toward the center) of both the left and

right sides, and 0.7mm at the surface area located inside the edge areas. The external dimensions comprised a width of 1060mm and a length of 110mm. The edge areas regarding which the thickness was not managed were then eliminated, and a  
5 glass plate having a usable width of 800mm and a length of 110mm was created. Here, the usable width is the width of the area having a uniform thickness.

The glass plate then underwent edge polishing and washing,  
10 and the final product was completed. The strain of the glass plate manufactured in this way was then measured using the optical heterodyne method. The result was a maximum birefringence  $R_e$  of 0.77 (maximum strain:  $0.04 \text{ kg/mm}^2$ ). The results of measurement of the stress distribution in this  
15 embodiment are shown in Fig. 7. As shown in the drawing, not only was the maximum strain amount reduced, but the strain distribution was made almost uniform.

From comparison of the glass plate of this embodiment and  
20 a conventional glass plate shown in Fig. 4, which was manufactured without strain reduction processing, it is seen that the glass plate of this embodiment has superior strain uniformity and a smaller amount of strain.

25 In this embodiment, because damage to the sheet glass 8 occurring due to strain was prevented through the slow cooling process, the yield was improved by 10%.

(Manufacturing of liquid crystal device)

A liquid crystal device was manufactured from the glass plates manufactured through the above embodiment. Specifically, two 423 x 275mm glass plates were cut out from a single 550 x 650mm full-size glass plate. The total pitch shift amount of these cut out plates was 0.40 $\mu$ m. It is preferred that the total pitch shift amount be 1.0 $\mu$ m or lower.

If the relationship between the total pitch shift amount and the strain of a full-size glass plate (the size of the glass plate before the smaller glass plates are cut out) is sought beforehand, the total pitch shift amount of the glass plates used in an actual display apparatus can be managed via management of the strain amount of the full-size glass plate. Fig. 8 shows a graph indicating the correlation between these two values. In the graph, the vertical axis represents the total pitch shift amount (in  $\mu$ m) occurring in the glass plate obtained through cutting, and the horizontal axis represents the birefringence (in nm) of a full-size glass plate prior to cutting.

From the glass plates of this embodiment in which the occurrence of strain was inhibited, color filter glass substrates and TFT glass substrates were manufactured. Liquid crystal display devices were then manufactured by aligning the alignment marks on each glass plate. Because the glass plates of this embodiment having reduced strain were used here, the manufacture of the liquid crystal devices could be carried out with a high yield.



The present invention may be applied to a downdraw method different from the downdraw method of the embodiment described above. For example, the present invention may be applied to  
5 the conventional downdraw method described with reference to the prior art.

In the above embodiment, two types of strain reduction processes were used, but it is acceptable if only one of these  
10 processes is used in regard to the present invention.

Furthermore, the above embodiment used a heat treating unit comprising multiple heaters arrayed in the widthwise direction of the sheet glass 8 such that a prescribed  
15 temperature distribution was formed in the same direction through individual control of the temperatures of the heaters. However, it is acceptable if the present invention uses a heat treating unit that has only a single heater than emits a uniform heat, and a prescribed temperature distribution in the  
20 widthwise direction of the sheet glass 8 is obtained through the placement of appropriate thermal insulators on the surface of the heater.

Moreover, the present invention may be applied in the  
25 manufacture of glass substrates used in a display apparatus other than a liquid crystal device or in a different electronic product (such as an information recording medium).

## INDUSTRIAL APPLICABILITY

Using the present invention, sheet glass in which the occurrence of strain is inhibited may be manufactured using  
5 the downdraw method. In particular, the occurrence of strain in the widthwise direction of the sheet glass may be inhibited. As a result, strain in the glass plates cut out from the sheet glass may be reduced.

10 Therefore, when a fine pattern is formed via photolithography on a glass plate manufactured using the present invention, offset of the position of the pattern may be prevented.

15 Furthermore, where sheet glass is manufactured via the downdraw method using the present invention, because the occurrence of heat strain is inhibited, when the sheet-shaped glass is drawn downward while being slowly cooled, damage to the sheet-shaped glass may be prevented. As a result, the  
20 production yield may be improved.

In addition, using the display glass substrates manufactured using the present invention, the yield obtained in the manufacture of the display apparatuses may be improved.

## CLAIMS

1. A glass plate manufacturing method for manufacturing a glass plate by forming molten glass into a sheet using the  
5 downdraw method and subjecting the obtained sheet glass to slow cooling using heat treating unit, wherein a strain reduction process to reduce strain occurring in the sheet glass due to the temperature difference between the edge areas and the surface area in the widthwise direction of the sheet  
10 glass is carried out during the slow cooling.

2. The glass plate manufacturing method according to claim 1, wherein the temperature difference occurs between the center region of the surface area and the edge areas.  
15

3. The glass plate manufacturing method according to claim 1 or claim 2, wherein the sheet glass subjected to slow cooling exhibits a widthwise temperature distribution such that the surface area has a lower temperature than the edge  
20 areas.

4. The glass plate manufacturing method according to any of claims 1 through 3, wherein the strain reduction processing is carried out based on the strain distribution in  
25 the post-molding glass plate measured in advance using the optical heterodyne method.

5. The glass plate manufacturing method according to any of claims 1 through 4, wherein the strain reduction

process comprises a heat treatment that forms a prescribed temperature distribution in the widthwise direction of the sheet glass so that the temperature difference in the widthwise direction of the sheet glass after molding is  
5 reduced when the sheet glass after molding is subjected to slow cooling by means of the heat treating unit.

6. The glass plate manufacturing method according to claim 5, wherein the heat treatment is carried out at least  
10 during a process in which the sheet glass is slowly cooled from the molding temperature to a temperature near the strain point.

7. The sheet glass manufacturing method according to  
15 claim 5 or claim 6, wherein the heat treatment is a process in which the temperature distribution that is formed, in the widthwise direction of the sheet glass, by the heat treating unit for heating the sheet glass is set such that the temperature difference in the widthwise direction of the sheet  
20 glass may be reduced.

8. The glass plate manufacturing method according to any of claims 1 through 3, wherein the strain reduction process reduces strain occurring from the surface area to the  
25 edge areas by increasing the amount of extension of the edge areas relative to the amount of extension of the surface area in accordance with the heat contraction difference occurring between the edge areas and the surface area in the widthwise direction of the sheet glass.

9. A glass plate manufacturing method wherein the maximum strain of the manufactured sheet glass is 0.07 kg/mm<sup>2</sup> or less.

5

10. The glass plate manufacturing method according to any of claims 1 through 9, wherein the glass plate is a glass substrate used in a display apparatus.

10 11. A glass plate manufacturing apparatus comprising:  
a molding unit that molds molten glass provided  
continuously from a molten glass storage tank into a sheet;  
drawing unit that draws down the sheet glass molded by  
the molding unit and existing in a softened state; and  
15 strain reduction unit that reduces the strain caused by  
the temperature difference occurring from the edge areas to  
the surface area in the widthwise direction of the sheet glass.

12. The glass plate manufacturing apparatus according to  
20 claim 11, wherein the strain reduction unit comprises heat  
treating unit that slowly cools the sheet glass after molding,  
and sets in the widthwise direction of the sheet glass a  
temperature distribution that reduces the temperature  
difference in the widthwise direction of the post-molding  
25 sheet glass.

13. The glass plate manufacturing apparatus according to  
claim 11, wherein the strain reduction unit has:

heat treating unit that slowly cools the sheet glass  
after molding; and

controlling unit that performs control to ensure that the  
amount of extension of the edge areas is larger than the  
5 amount of extension of the surface area in accordance with the  
temperature difference from the surface area to the edge areas  
of the sheet glass that is being slowly cooled by the heat  
treating unit.

10 14. A liquid crystal device comprising liquid crystal  
held between a pair of glass plates formed using the glass  
plate manufacturing method according to any of claims 1  
through 10.

## ABSTRACT

When a glass substrate for a liquid crystal display is manufactured using the downdraw method, strain caused by  
5 differences in the temperature of the sheet glass achieved as a result of cooling are reduced. Furthermore, minute strain that occurs when the sheet glass manufactured using the downdraw method is cut into smaller pieces is inhibited.

10 When the sheet glass 8 is manufactured using the downdraw method, a temperature distribution is formed in the widthwise direction of the sheet glass 8 by the heat treating unit 9 used in the slowly cooling process after molding. This  
15 temperature distribution is a distribution that can offset the temperature distribution in the sheet glass 8 caused by the fact that the thickness of the sheet glass 8 after molding is greater in the edge areas than that in the surface area.

FIG.1

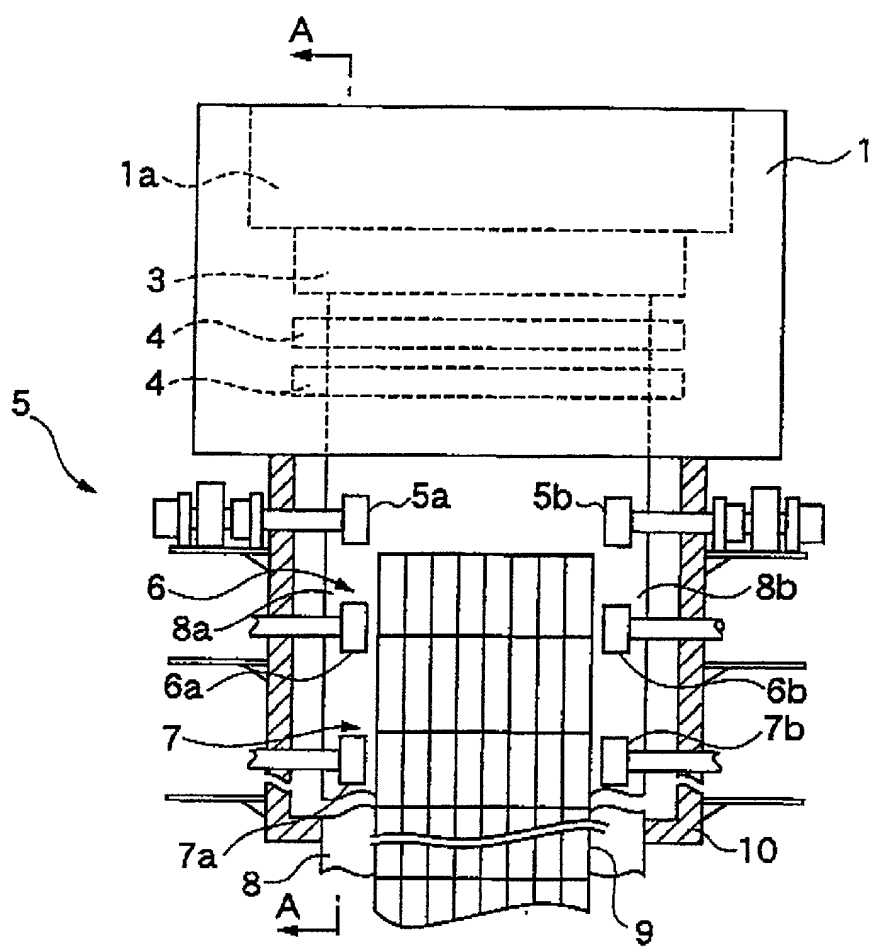




FIG.2

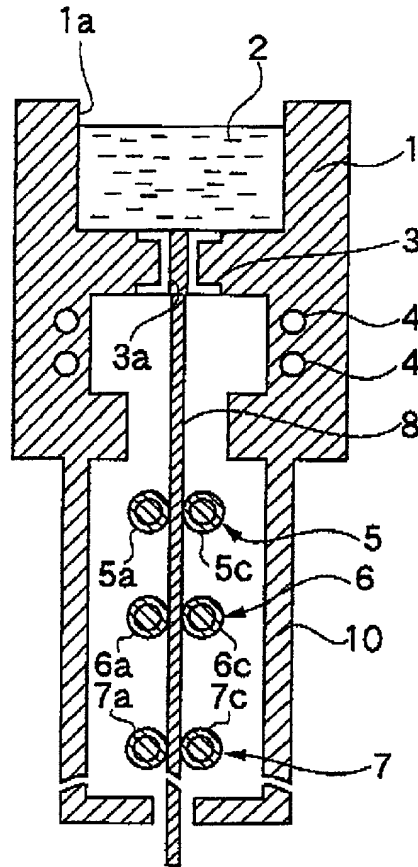


FIG.3

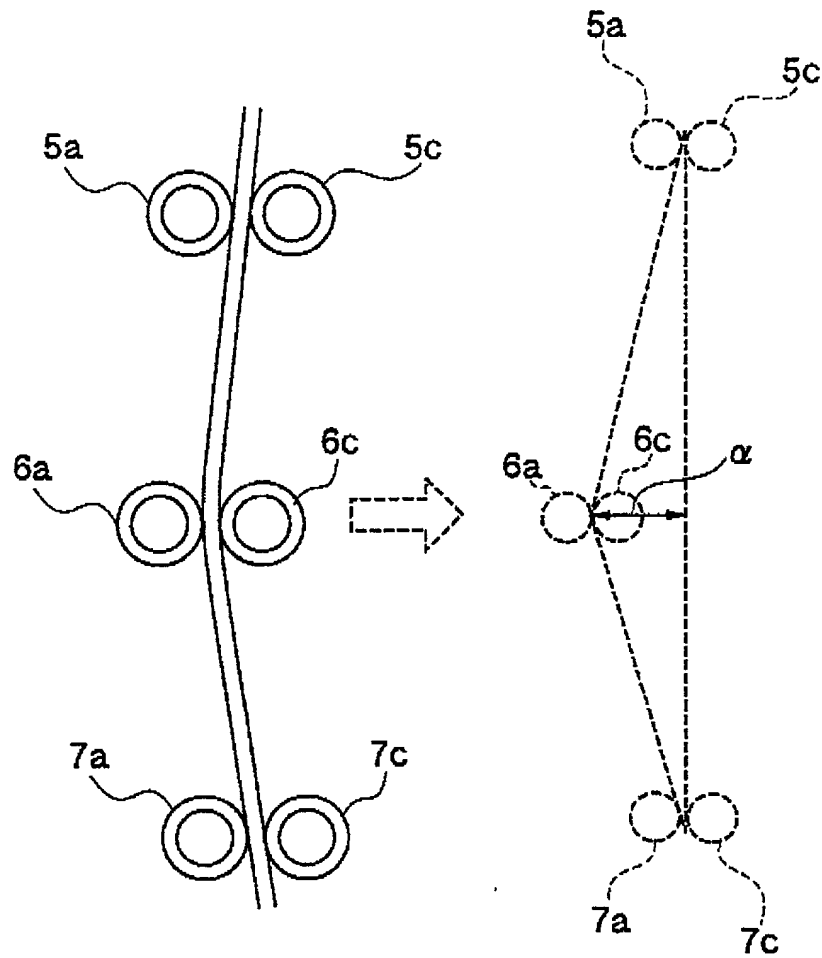


FIG.4

	Re (nm)
$\bar{x}$	1.81
30	2.75
Max.	4.10
Min.	0.03
$n \leq 200$	

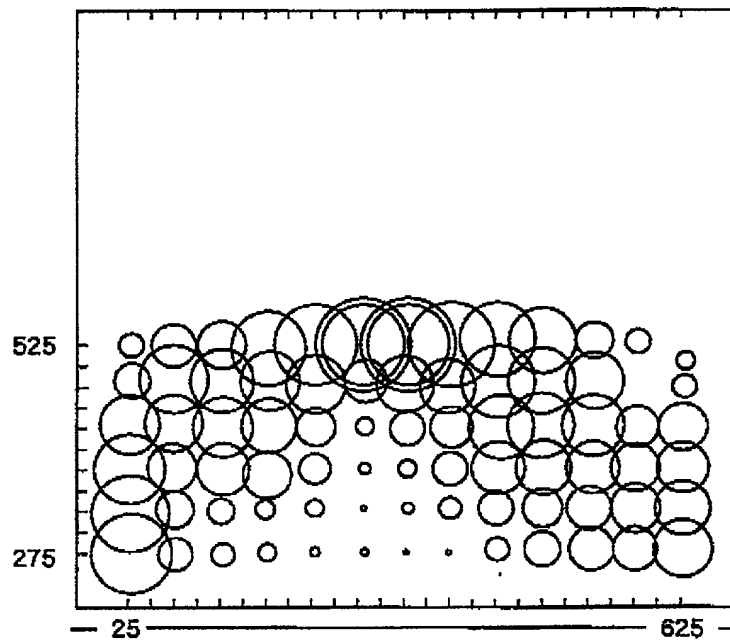


FIG.5

	L	C	R
1 ATMOSPHERE	797	808	795
1 GLASS	711	730	702
2 ATMOSPHERE	748	761	743
2 GLASS	690	695	683
3 ATMOSPHERE	736	766	731
3 GLASS	657	660	654
4 ATMOSPHERE	734	764	719
4 GLASS	631	630	622

FIG.6

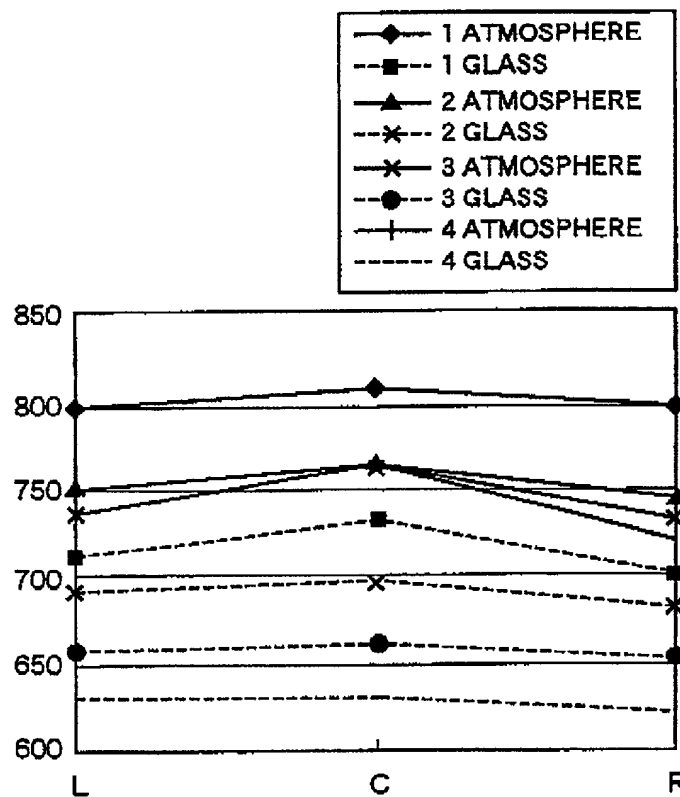


FIG.7

	Re (nm)
$\bar{x}$	0.29
30	0.46
Max.	0.77
Min.	0.03
$n \leq 200$	

0 1 2 3  $\times 1.5\text{nm}$   
(Ratio)


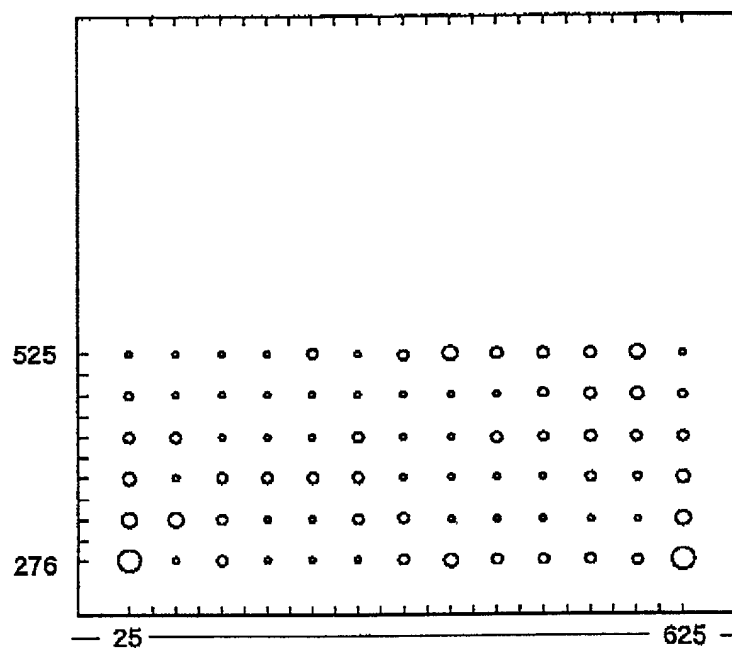


FIG.8

CORRELATION BETWEEN STRAIN AND T.P. SHIFT  
AMOUNT WHEN SHEET GLASS IS SEGMENTED

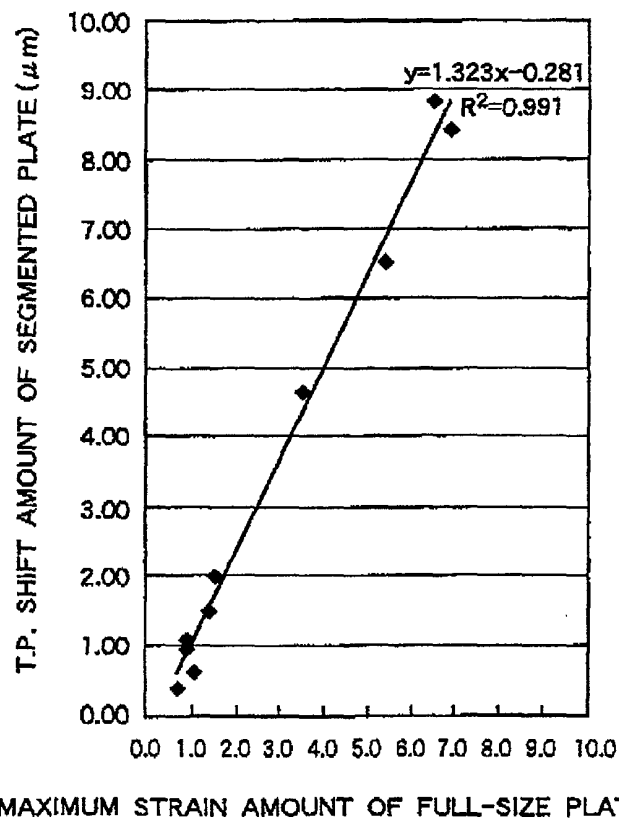

**DECLARATION AND POWER OF ATTORNEY  
UNDER 35 USC §371(c)(4) FOR  
PCT APPLICATION FOR UNITED STATES PATENT**

As a below named inventor, I hereby declare that:  
my residence, post office address and citizenship are as stated below under my name;

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought, namely the invention entitled: GLASS PLATE MANUFACTURING METHOD, GLASS PLATE MANUFACTURING APPARATUS, AND LIQUID CRYSTAL DEVICE described and claimed in international application number PCT/JP00/04898 filed July 21, 2000.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) filed within one year prior to my international application are hereby claimed:

Japanese Patent Application No. 11-208171 filed July 22, 1999

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to my international application, or (b) before the filing date of the above-named foreign priority application(s):

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

**James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;**

**Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;**

**Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;**

**Mario A. Costantino, Reg. No. 33,565; and Caroline D. Dennison, Reg. No. 34,494.**

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & BERRIDGE, PLC, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.**

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1 **Typewritten Full Name of Sole or First Inventor** Hirovuki KARIYA

2 **Inventor's Signature** Hirovuki Kariya

3 **Date of Signature** March 5 2001

**Residence:** Yokohama-shi Kanagawa-ken Japan

**Citizenship:** Japanese City State or Province Country

**Post Office Address:** C/O NH TECHNO GLASS CORPORATION

**(Insert complete mailing address, including country)** 12-20, Shinyokohama 2-chome, Kouhoku-ku, Yokohama-shi, Kanagawa-ken, 222-0033, Japan

**Note to Inventor:** Please sign name on line 2 exactly as it appears in line 1 and insert the actual date of signing on line 3.

**IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE** ☐